

CUSTOMFIT

bachmaier<sup>®</sup> helmet 

// BG-Zulassung | Occupational insurance association licence  
// Geprüft nach EN 352-2 | Tested in accordance with EN 352-2




26dB  
SNR

## Schalldämmung | Sound attenuation

	SNR-Wert SNR value (dB)	H-Wert H value (dB)	M-Wert M value (dB)	L-Wert L value (dB)
work I	26	28	22	20

## Dämmkurven | Attenuation curves

Mittelwert der Schalldämmung (db) | Average value of sound attenuation (dB)

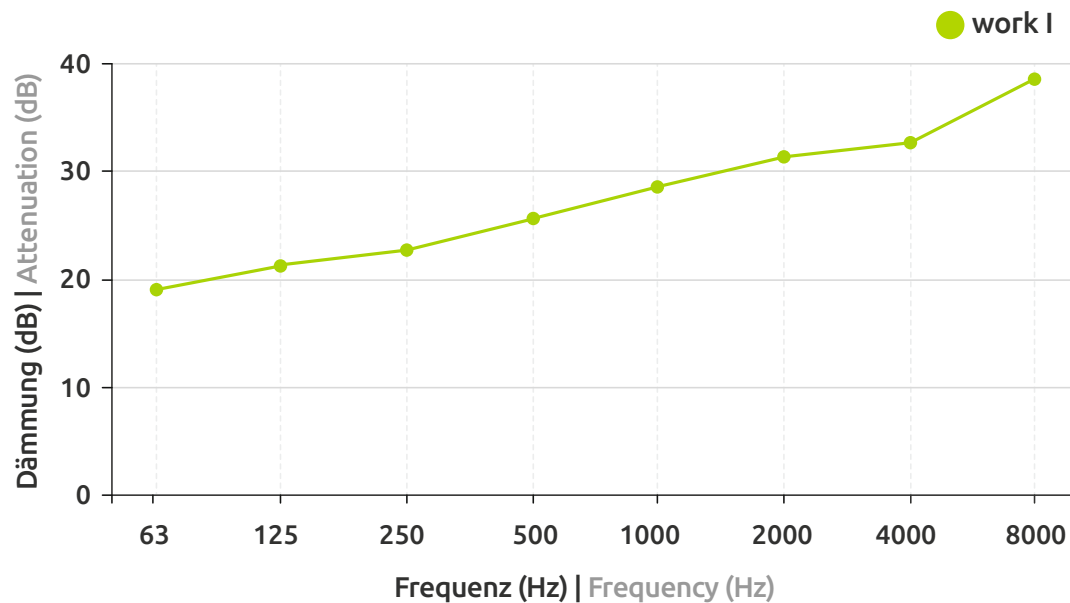

## Technische Daten | Specifications

	Frequenz Frequency (Hz)	Mittelwert* Average value* (dB)	Standardabweichung Standard deviation (dB)	Schutzwirkung** Protection** (dB)
Filter work I weiß   white	63	20,6	4,5	16,1
	125	23,8	5,0	18,8
	250	23,6	4,7	18,9
	500	24,2	5,6	18,6
	1000	26,0	4,4	21,6
	2000	33,8	3,7	30,1
	4000	36,5	4,9	31,6
	8000	35,9	5,1	30,8

\* der Schalldämmung | of sound attenuation

\*\* APV (angenommen) | APV (assumed)

Weitere Angaben können beim Hersteller angefordert werden.  
Further details can be requested from the manufacturer.